


269.00 EUR
incl. 19% VAT, plus [shipping](#)

- Displaylink !
- 1024x600 !
- Capacitive Touchscreen !
- VESA-75 !

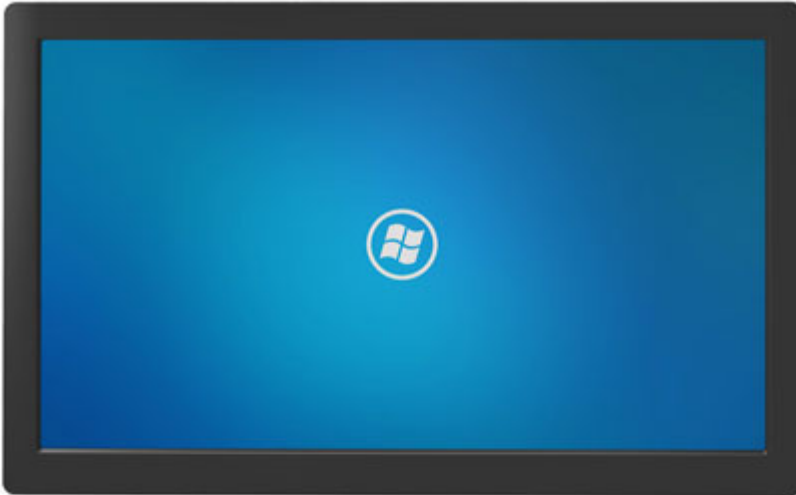

Difference to UM-1010S : VESA (75mm) compatible mounting adapter option on display rear side. You can mount the display on any VESA compatible mounting unit.

This TFT monitor is connected to a Windows PC USB connector. The display is working as an additional display which can be added to the main display area on the left, right, upper or lower. Alternatively it can mirror the primary screen. The display can be swiveled in steps of 90°.

In addition, the UM-1010S model comes with capacitive multi touchscreen.

Specifications :

Model	UM-1010S (10.1")
-------	------------------

Display Size	225mm (H) x 127mm (V)
Response time	16ms
Number of Colors	16.7M
Contrast	500:1
Brightness	200 cd/m ²
Signal input	USB mini-B type (5 pin)
Input Power	USB (DC 5V)
Screen resolution	1024x600)
Power consumption	3.3W~4.9W
Dimensions	248x153x19 (WxHxD)mm
Weight	~0,6 kg

System requirements:

- CPU : 1.2Ghz+
- RAM : 512MB RAM+
- USB : min. 1x USB 2.0
- HDD : 30MB
- OS : Windows 10/8.1/8 /7/Vista with Service Pack 1 or 2 (32-bit or 64-bit), LINUX, Ubuntu, Raspberry Pi, Mac OS X (Intel CPU Based, Non-touch Display only) Mountain Lion 10.8/Lion 10.7/Snow Leopard 10.6/Leopard 10.5/Tiger 10.4

Notes :

- 3D applicationes (eg. 3D games) can not be displayed.

- How many displays can be connected to a PC at the same time ?

1-2 displays : 1.2Ghz CPU, 512MB RAM

3-5 displays : 1.8Ghz CPU, 1GB RAM

6++ displays : 1.6Ghz Dual-Core CPU, 1GB RAM

- MAC OS Support ?

Display, webcam, etc. : Yes

Touchscreen (MAC OS) : Right now only available with non-free 3-rd party driver.

Touchscreen-Driver for Windows is free and included with the shipment !