


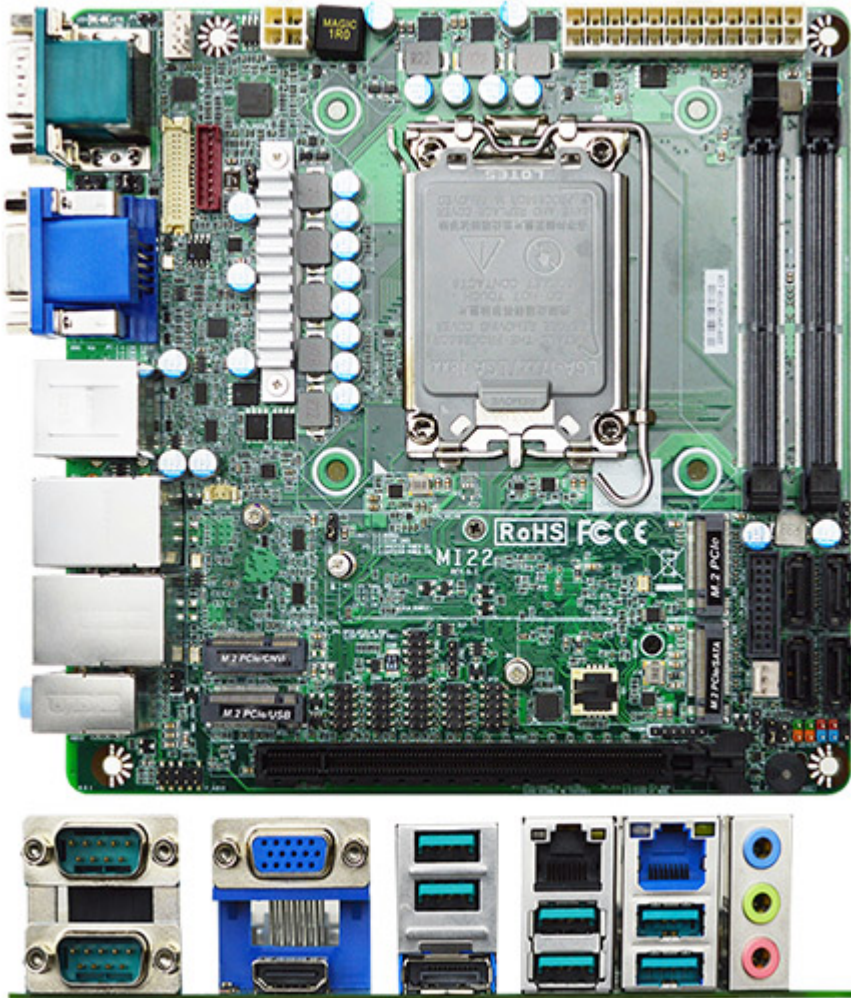

379.00 EUR

incl. 19% VAT, plus [shipping](#)

- Q670E Chipset!
- MiniITX !
- 2x LAN !
- 6x USB !

The JETWAY MI22-Q6700 Series is Mini-ITX form factor board adopts the Intel® 12th/13th generation Core i7/i5/i3, Pentium & Celeron Processor. The board supports two DDR4 SO-DIMM 3200MHz memory, up to 64GB. Featuring the integrated Intel® Ethernet controller, the MI22-Q6700 Series offers one 10/100/1000 & one 10/100/1000/2500 Base-TX Ethernet devices for network transmission. Four SATAIII (6Gb/s) interface and one M.2 M-key 2280 (PCIe Gen.3 x4) support NVMe, one M.2 M-key 2242 (PCIe Gen.4 x4/SATA) support NVMe offer storage devices. One M.2 E-key 2230 (USB2.0/PCIe Gen.3x1) support CNVi, one M.2 B-key 3042 (PCIe Gen.3x1/USB3.2 Gen.2/USB2.0) support 4G/5G, six USB3.2 Gen.2 ports, two USB3.2 Gen.1, three USB2.0 ports and six COM ports provide versatile expansion. The PCIe Gen.4 x16 slot can support Jetway riser card for different expansion. The MI22-Q6700 Series offers one HDMI2.0 port, one VGA port, one DP1.4 port, and one LVDS/eDP port which can support 4 independent displays.

Application:

- Edge Computing
- Digital Signage
- Industrial PCs
- Factory Automation
- Public Sector
- Digital Security
- Surveillance application

- Intel® 12th/13th LGA1700 Socket Processor (Max. 65W TDP)
- Intel® Q670E Chipset

- 2* DDR4 3200MHz SO-DIMM up to 64GB
- 1* 10/100/1000 Base-TX & 1* 10/100/1000/ 2500 Base-TX Ethernet Ports
- 1* HDMI, 1* DP, 1* VGA, 1* LVDS/eDP
- 6* COM (COM1 support RS232/422/485)
- 6* USB3.2 Gen.2, 2* USB3.2 Gen.1, 3* USB2.0
- 1* PCIe Gen.4 x16 slot, 1*M.2 M-Key (2280, PCIe Gen.3 x4 interface) support NVMe, 1*M.2 E-Key (2230, USB2.0/PCIe Gen.3 x1 interface) support CNVi, 1*M.2 B-key (3042, PCIe Gen.3 x1 interface) support 4G/5G Module
- 4* SATAIII (6Gb/s)

Model	– MI22-Q6700 – MI22-Q6702 (onboard TPM2.0)	
Form Factor	– Mini-ITX (170 * 170mm)	
Processor System	– Intel® 12th/13th LGA1700 Socket Core i7/i5/i3/Pentium/Celeron Processor (Max. 65W TDP) – Intel® Q670E Express Chipset – AMI 256Mb Flash ROM BIOS	
Memory	– 2* Dual CH non-ECC DDR4 3200MHz SDRAM SO-DIMM up to 64GB	
Storage	– 4* SATAIII (6 Gb/s) support RAID 0, 1, 5, 10 – 1* M.2 M-Key (2280, PCIe Gen.3 x4 interface) support NVMe – 1* M.2 M-Key (2242, PCIe Gen.4 x4/SATA interface) support NVMe	
Expansion	– 1* M.2 E-Key (2230, USB2.0/PCIe Gen.3 x1 interface) support CNVi – 1* M.2 B-key (3042, PCIe Gen.3 x1/USB3.2 Gen.2/USB2.0 interface) – 1* PCIe Gen.4 x16	
Ethernet	– 1* Intel® i219LM GbE – 1* Intel® i225V 2.5GbE	
Graphics	– Intel® HD Graphics, shared memory – 1* DP 1.4a (Max Resolution: 4096×2304@60Hz) – 1* HDMI 2.0b (Max Resolution: 4096×2160@60Hz) – 1* LVDS/eDP (Max Resolution: 1920×1200@60Hz) – 1* VGA (Max Resolution: 1920×1200@60Hz) – Support Quad Displays	
Audio	– HD audio: Realtek ALC888S	
Watchdog Timer	– From Super I/O to drag RESETCON# – 256 segments (10sec ~ 255min)	
Internal I/O	– 2* USB3.2 (Gen.1) – 3* USB2.0 – 1* LVDS/eDP – 4* SATAIII – 4* COM (RS232) – 1* M.2 M-Key (2280, PCIe Gen.3 x4 interface) support NVMe – 1* M.2 M-Key (2242, PCIe Gen.4 x4/SATA interface) support NVMe – 1* M.2 E-Key (2230, USB2.0/PCIe Gen.3 x1 interface) support CNVi – 1* M.2 B-key (3042, PCIe Gen.3 x1/USB3.2 Gen.2/USB2.0 interface) support 4G/5G Module – 1* SIM slot – 1* PS/2 – 1* GPIO (8 bit) – 1* Chassis intrusion – 1* Audio Header – 1* SMBUS – 1* AT mode – Support onboard TPM2.0 (MI22-Q6702)	

External I/O	– 1* HDMI – 1* DP – 1* VGA – 2* RJ45 Ethernet – 6* USB3.2 (Gen.2) – 1* COM (RS232/422/485) – 1* COM (RS232) – Line-in, Line-out, MIC
Power	ATX PWR (4+24 pin), AT/ATX Supported – AT: Directly PWR on as Power input ready – ATX: Press Button to PWR on after Power input ready
Compliance	– CE, FCC, LVD, RoHS, REACH
Temperature	– Operating Temperature: -10 ~ 50° C – Storage Temperature: -20 ~ 85° C – Humidity: 10% ~ 90% RH @40°C (non-condensing)
OS Support	– Windows 10, Windows 11, Linux