


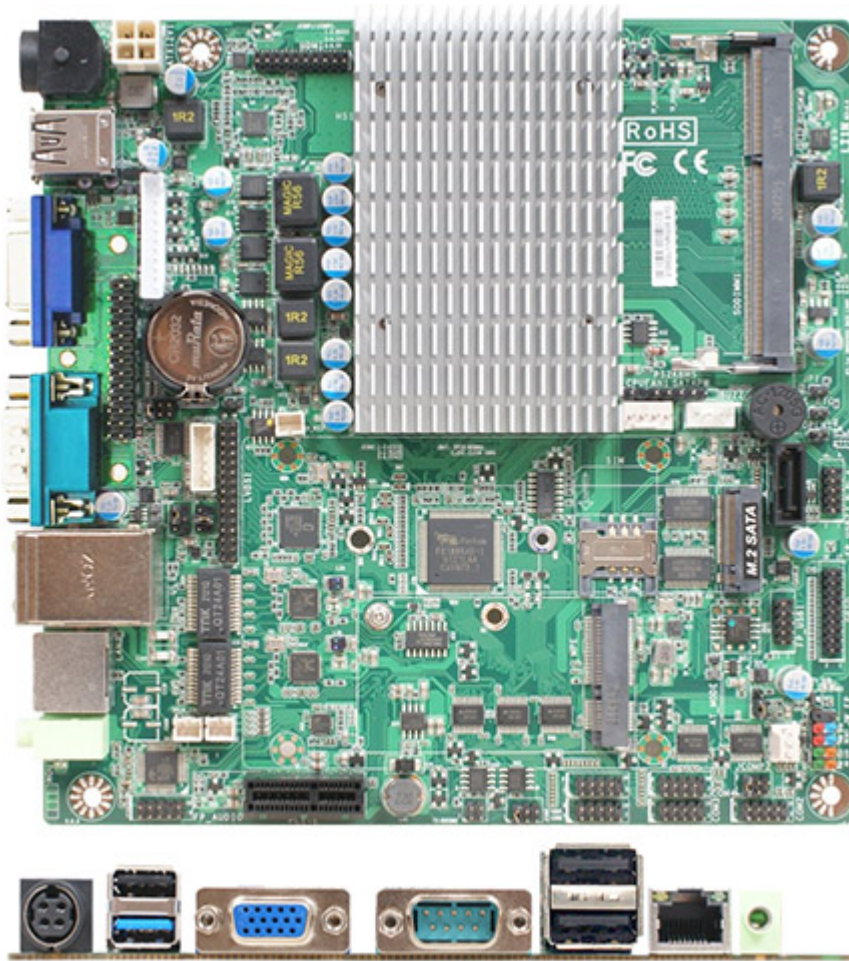

259.00 EUR
incl. 19% VAT, plus [shipping](#)

- J1900 BayTrail !
- 1x COM !
- Half-Height !
- Mini-ITX !

- Intel® Bay Trail J1900 2,0 GHz/QC Core MCP-Prozessor (Turbo 2,42 GHz)
- 1* DDR3L 1333 MHz bis zu 8 GB
- 1* Realtek® RTL8119I GbE
- 1* SATAII, 1*M.2 (M-Key)
- 1* VGA, 1* HDMI, 1* LVDS
- 1* RS232/422/485, 5* RS232, 1*USB3.0, 7* USB2.0
- 1* Mini-PCIe-Unterstützungs-WIFI/BT/4G-Modul
- 1* M.2 M-Key (2242/2280, SATA-Schnittstelle) unterstützt SSD
- 12 V DC-Eingang
- Dünner Mini-ITX-Formfaktor (170 x 170 mm)

Model	– JLI1N-00
Form Factor	– ITX (170 * 170mm)
Processor System	– Intel® Bay Trail J1900 2.0GHz/QC, 10W, Core MCP Processor (Turbo 2.42GHz) – AMI 32M Flash ROM BIOS
Memory	– 1* DDR3L 1333MHz SO-DIMM up to 8GB
Storage	– 1* SATAII (3.0Gb/s) – 1* M.2 M-key (2242/2280, SATA interface)
Expansion	– 1* Full size Mini PCIe – 1* PCIe x1 – 1* SIM card slot
Ethernet	– 1* Realtek RTL8119I GbE

Graphics	– Intel® Z3700 Graphics, shared memory – 1* HDMI 1.4 (Max Resolution: 2560×1600@60Hz) – 1* LVDS (Max Resolution: 2560×1600@60Hz) – 1* VGA (Max Resolution: 1920×1080@60Hz) – Support Dual Displays
Audio	– USB Audio, 3W Amplifier
Watchdog Timer	– From Super I/O to drag RESETCON# – 256 segments (10sec ~ 255min)
Internal I/O	– 4* USB2.0 – 1* RS232/422/485 – 4* RS232 – 1* SATAII – 1* SATA power – 1* M.2 (M-key, 2242/2280) – 1* Full size Mini PCIe – 1* GPIO (16bit, 5V, Co-lay Parallel) – 1* PCIe x1 – 1* SIM card slot – 1* AT mode – 1* Case Open – 1* FP_Audio Header – 2* 3W Amplifier – 1* CPU FAN
External I/O	– 1* VGA – 1* RJ45 – 1* USB3.0 – 3* USB2.0 – 1* RS232 – Line-out – 12V DC-in
Power	DC-in 12V – AT: Directly PWR on as Power input ready – ATX: Press Button to PWR on after Power input ready
Compliance	– CE, FCC, RoHS, REACH
Temperature	– Operating: 0°C ~ 60°C – Storage: -20°C ~ 70°C – Humidity: 10% ~ 90% RH @40°C (non-condensing)
OS Support	– Windows 7 / 8 /10, Linux