


269.00 EUR

incl. 19% VAT, plus [shipping](#)

- LGA1151 Socket !
- H310 Chipset !
- MicroATX !

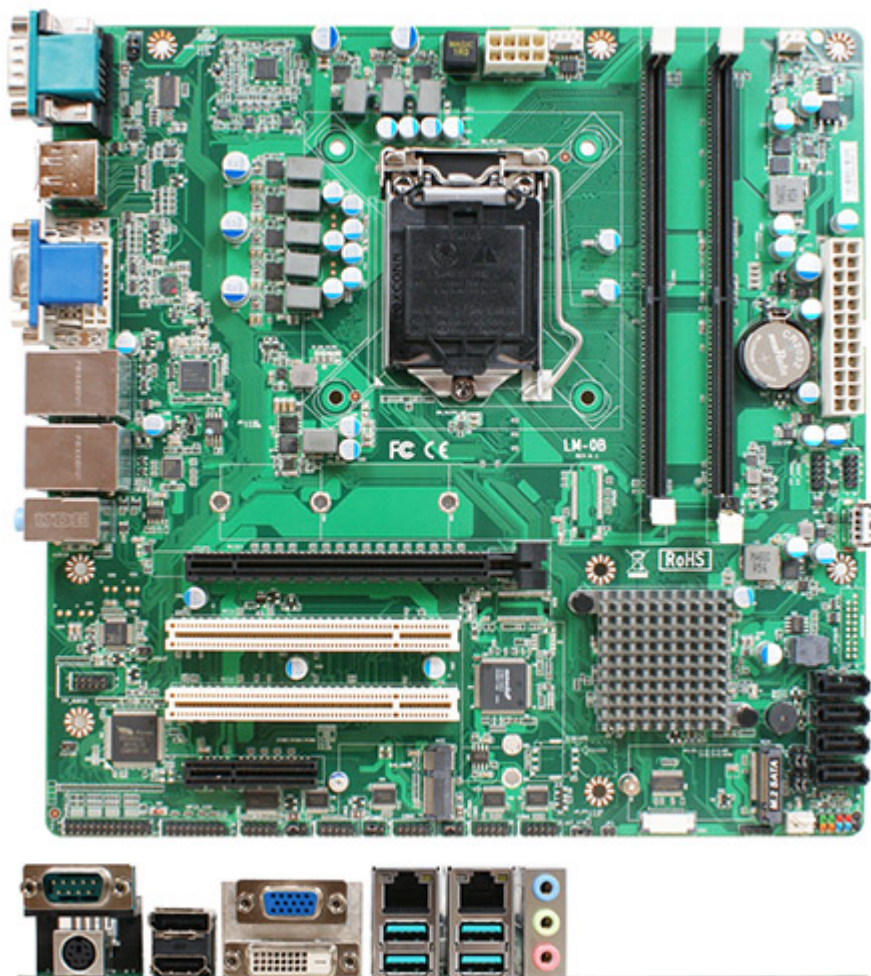

- Intel® LGA1151 Socket support 9/8th Gen. Core Processor (Max 95W)
- Intel® Coffee Lake-S H310 Chipset
- 2\* DDR4 2666/2400/2133MHz SO-DIMM up to 64GB
- Realtek HD Audio (LM0B-00 model)
- 1\* Intel® I219-V GbE, 1\* Intel® i211AT GbE
- 4\* SATAIII (6Gb/s), 1\* M.2 (M-key ), 1\* M.2 (E-key) support CNVi, 1\* PCI-E x16, 1\* PCI-Ex4, 2\* PCI
- Support VGA / DVI-D / HDMI / DP dual display
- 2\* RS232/422/485 (COM1/2), 4\* RS232, 4\* USB3.1, 5\* USB2.0
- ATX Power Input
- Micro ATX Form Factor (244 \*244 mm)

|                  |                                                                                                                                                                                         |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model            | <ul style="list-style-type: none"> <li>– JLM0B-00</li> <li>– JLM0B-0A (Without Audio)</li> </ul>                                                                                        |
| Form Factor      | – Micro ATX (244 * 244mm)                                                                                                                                                               |
| Processor System | <ul style="list-style-type: none"> <li>– Intel LGA1151 Socket support 9/8th Gen. Core Processor (Max 95W)</li> <li>– Intel H310s chipset</li> <li>– AMI 128Mb Flash ROM BIOS</li> </ul> |

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Expansion Slot | <ul style="list-style-type: none"> <li>– 2* PCI</li> <li>– 1* M.2 M-key (2242, Co-lay SATA4)</li> <li>– 1* M.2 E-key (2230, support CNVi)</li> <li>– 4* SATA (SATA4 Co-lay M.2)</li> <li>– 1* PCIe x16, 1* PCIe x4</li> </ul>                                                                                                                                                                                                                               |
| Memory         | – 2* DDR4 2666/2400/2133MHz LONG DIMM up to 64GB                                                                                                                                                                                                                                                                                                                                                                                                            |
| Graphics       | <ul style="list-style-type: none"> <li>– Intel® HD Graphics, shared memory</li> <li>– 1* VGA (Max Resolution: 1920×1080@60Hz)</li> <li>– 1* HDMI 1.4 (Max Resolution: 4096×2304@24Hz)</li> <li>– 1* DVI-D (Max Resolution: 4096×2304@24Hz)</li> <li>– 1* DP (Max Resolution: 4096×2304@60Hz)</li> <li>– Support Dual Displays</li> </ul>                                                                                                                    |
| Ethernet       | <ul style="list-style-type: none"> <li>– 1* Intel I219-V GbE</li> <li>– 1* Intel i211AT GbE</li> </ul>                                                                                                                                                                                                                                                                                                                                                      |
| Audio          | – Realtek HD audio (JLM0B-00 only)                                                                                                                                                                                                                                                                                                                                                                                                                          |
| SATA           | – 4* SATAIII (6.0Gb/s)                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Rear I/O       | <ul style="list-style-type: none"> <li>– 1* VGA</li> <li>– 1* DVI-D</li> <li>– 1* HDMI</li> <li>– 1* DP</li> <li>– 2* RJ45</li> <li>– 4* USB3.1</li> <li>– 1* RS232/422/485 (support 5/12V)</li> <li>– 1* PS/2</li> <li>– Line-in, Line-out, MIC</li> </ul>                                                                                                                                                                                                 |
| Internal I/O   | <ul style="list-style-type: none"> <li>– 4* USB 2.0, 1* USB2.0 (Erect)</li> <li>– 5* COM (COM2: RS232/422/485, COM3-6: RS232, COM1-4: support 5/12V TTL)</li> <li>– 4* SATAIII (6.0Gb/s, SATA4 Co-lay M.2 M-key)</li> <li>– 1* M.2 M-key, 1* M.2 E-key</li> <li>– 1* Parallel</li> <li>– 1* GPIO (16 bit)</li> <li>– 1* Chassis intrusion</li> <li>– 1* Audio Header</li> <li>– 1* SMBUS/I2C</li> <li>– 1* AT mode</li> <li>– 1* TPM2.0 (option)</li> </ul> |
| Watchdog Timer | <ul style="list-style-type: none"> <li>– From Super I/O to drag RESETCON#</li> <li>– 256 segments (10sec ~ 255min)</li> </ul>                                                                                                                                                                                                                                                                                                                               |
| Power          | <p>ATX PWR (8+24 pin), AT/ATX Supported</p> <ul style="list-style-type: none"> <li>– AT: Directly PWR on as Power input ready</li> <li>– ATX: Press Button to PWR on after Power input ready</li> </ul>                                                                                                                                                                                                                                                     |
| Compliance     | – CE, FCC, RoHS, REACH                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Temperature    | <ul style="list-style-type: none"> <li>– Operating: 0°C ~ 60°C</li> <li>– Storage: -20°C ~ 85°C</li> <li>– Humidity: 10% ~ 90% RH @40°C (non-condensing)</li> </ul>                                                                                                                                                                                                                                                                                         |
| OS Support     | – Windows 10, Linux                                                                                                                                                                                                                                                                                                                                                                                                                                         |